


Mini USB 640-4B Series



SHELL B Type

MATERIAL

1. HOUSING : THERMOPLASTIC + 30% G.F. UL94V-0.
2. CONTACT : PHOSPHOR BRONZE.
3. SHIELD : BRASS.

FINISH


1. CONTACT : GOLD OVER 50u" NICKEL.
2. SOLDER TAIL : 120u" MIN. TIN-LEAD OVER 50u" NICKEL.
3. SHIELD : TIN PLATED OR NICKEL PLATED.

SPECIFICATION

1. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 750 VAC AT SEA LEVEL.
3. INSULATION RESISTANCE : 1000 MEGOHMS MIN.

ENVIRONMENTAL

1. TEMPERATURE RANGE : -50°C TO +105°C.

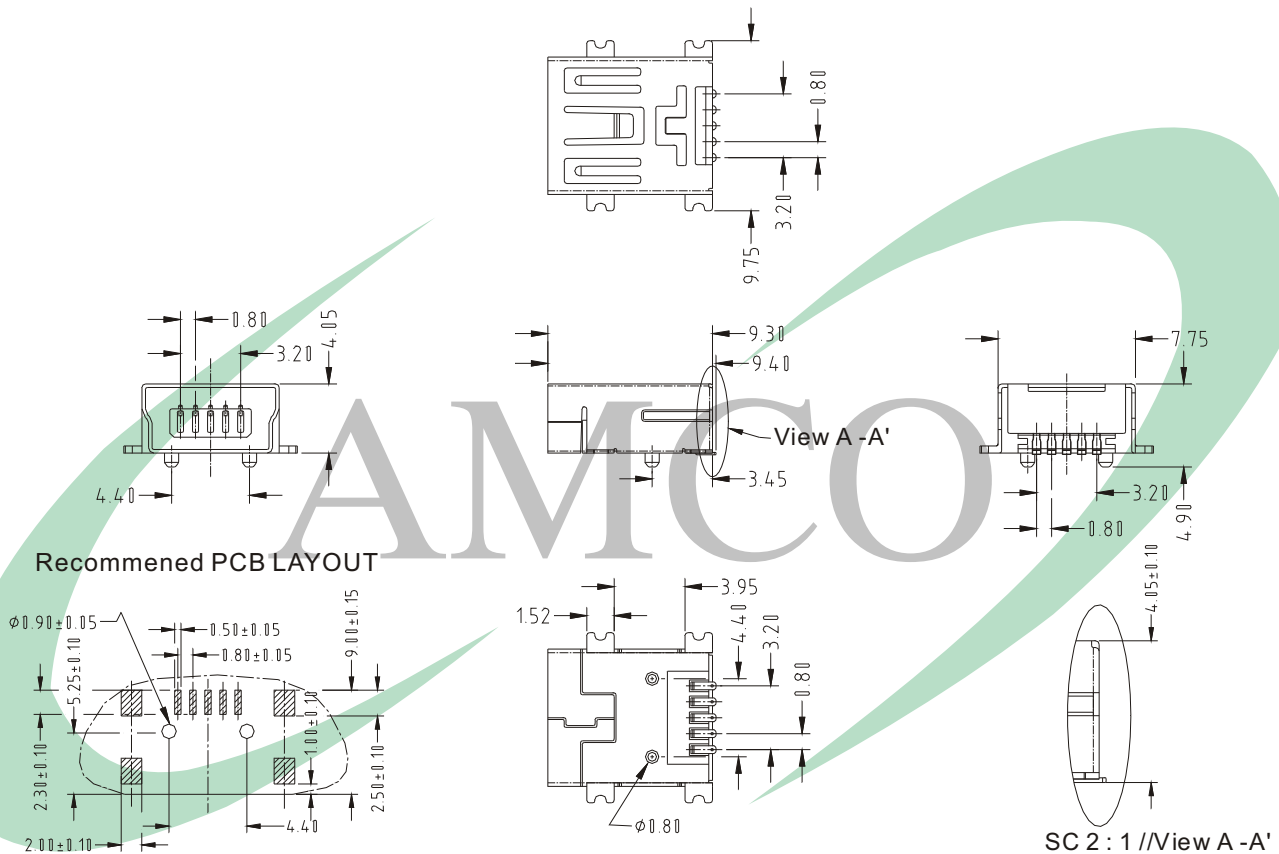

How To Order

| Series Number | Number of Contacts | Shell Type | Contact Plate | Plastic Color | Branding |
|-------------------------|--------------------|--------------------------|--|--------------------|------------------------------|
| 6 4 0 | 5 | B | S 1 | B | N |
| Single Port SMT Type | 4Pin 5Pin | A B C D | S1 : Gold Flash S2 : 3u"Gold S3 : 5u"Gold S4 : 10u"Gold S5 : 15u"Gold S6 : 30u" Gold (S : Slective Gold) | B:Black W:White | A : AMCO Mark N : No Mark |